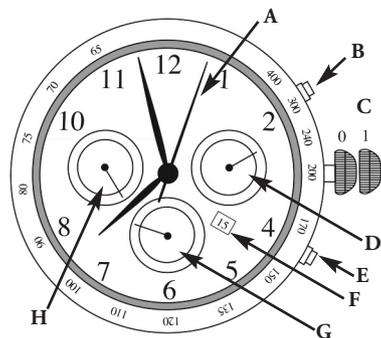


WATCH DISPLAY

- A - CHRONO SECOND HAND
- B - START/STOP CHRONO BUTTON
- C - CROWN
- D - 24-HOUR DIAL
- E - SPLIT/RESET CHRONO BUTTON
- F - DATE WINDOW
- G - SECOND COUNTER DIAL
- H - MINUTE COUNTER DIAL

TIMESSETTING

Locate the crown on your Stauer watch (see diagram part C) and please note the three crown positions (0-1-2).

1. To set the time: When the second hand (part A) is at the 12 o'clock position, pull the crown (part C) out to position "2." Rotate the crown until the desired time is set.
2. When finished setting the time, push the crown back to the "0" (zero) position. At this point the second hand (part A) will run.

SETTING THE DATE

1. Pull the crown (part C) out to position "1".
2. Turn the crown clockwise (away from you) to set the date (part F).
3. After the date has been set, push the crown back to position "0" (zero).

- The date should not be adjusted between approximately 9:00pm to 1:00am.

USING THE CHRONOGRAPH

This chronograph measures and displays time in 1 second increments up to a maximum of 59 minutes 59 seconds.

1. The chronograph can be started and stopped by pressing button "B." Note: for measuring split times you will use the "E" button for stopping.
2. Pressing button "E" resets the chronograph and the chronograph second hand (part A), minute counter (part H) and seconds counter (G) return to the zero position.
3. For split time, pressing "E" again after stopping the chronograph will restart the chronograph function. Then press the "B" button to stop, and the "E" button to reset.

CHRONOGRAPH RESET (INCL. AFTER REPLACING BATTERY)

This procedure should be performed when the chronograph second hand does not return to zero position after the chronograph has been reset and after the battery has been replaced.

1. Pull the crown (part C) out to position 2.
2. Press button "B" to set the chronograph second hand (part A) to the zero position.
3. The chronograph second hand "A" and minute hand dial (part H) can be advanced rapidly by continuously pressing button "B".
4. Once the hands have been set to zero position, press button "B" to reset the second hand (part A) and then return the crown to the normal "0" position.

FEATURES

- Precise quartz movement
- Stainless steel case
- Chronograph
- 3 ATM water resistance
- Adjustable nylon band

IMPORTANT

When resetting the chronograph, only return the crown to the normal "0" position when the second hand (part A) is in the zero position. The second hand (part A) stops on the way when the crown is returned to the normal position and that position is recognized as the zero position.

Stauer[®]
HERITAGE OF ART & SCIENCE

Stauer Monaco F2 Watch

INSTRUCTION MANUAL



Visit us at www.stauer.com
to learn more about the fantastic
benefits of owning a Stauer Watch!

www.stauer.com