


## WATCH DISPLAY

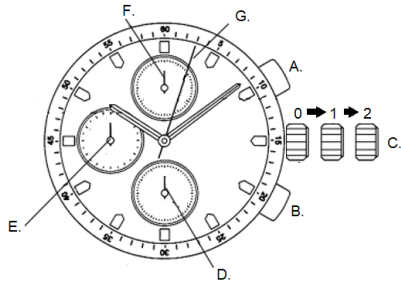

- A - Start/Stop Chrono Button
- B - Chrono Reset Button
- C - Crown
- D - Seconds Dial
- E - Chrono Hour Dial
- F - Chrono Minute Dial
- G - Chrono Seconds Hand

## TIMESSETTING

Locate the crown on your Stauer watch (see diagram part C) and note the three crown positions (0-1-2).

1. Pull the crown out to position "2" and rotate the crown clockwise until the desired time is set.
2. When finished setting the time, push the crown back to the "0" (zero) position. At this point the small second hand (dial part D) will begin to move.

## USING THE CHRONOGRAPH

This chronograph is able to measure and display time in 1/1th second unit; up to a maximum of 11 hours 59 minutes 59 seconds.

### Using the stopwatch function:

1. Push the button "A" to START/STOP the chronograph.
2. Push the button "B" to RESET all the chronograph hands to zero.

## CHRONOGRAPH RESET

### (AFTER REPLACING BATTERY)

This procedure should be performed when the chronograph second hand does not return to zero position after the chronograph has been reset and after the battery has been replaced.

1. Pull the crown out to position "2" and press button "A" to set the chronograph second hand to the zero position. The chronograph hand can be advanced rapidly by continuously pressing or holding down button "A".
2. Once the hand has been set to zero position, push the crown down to the normal "0" position.

## NOTE

Do not push the crown to the normal position while the chronograph second hand returns to the zero position. It stops on the way when the crown is returned to the normal position and its position is recognized as the zero position.

## ADJUSTING THE BAND

To adjust the band: Remove equal number of links from both sides of the closure by carefully sliding out the pins in each link. To do this, you will need to use a sharp pointed tool. Insert it into the recessed side of the link. With a solid tap, push the pin out until it is easy to pull the pin using needle nose pliers. Once the required amount of links are removed, join the remaining links together using the removed pins. It is necessary to secure the pins in place by making sure that they are flush with one side of each link. To ensure that watch is fitted properly, we recommend that your Stauer watch be handled by a professional.

Visit us at, [www.stauer.com](http://www.stauer.com) to learn more about the fantastic benefits of owning a Stauer Watch. [www.stauer.com](http://www.stauer.com)

**Stauer**<sup>®</sup>  
HERITAGE OF ART & SCIENCE

INSTRUCTION MANUAL

